




# Tasman<sup>®</sup> Security Screen Door Lock

## FEATURES OF THE TASMAN<sup>®</sup> LOCKING HANDLE

The Tasman<sup>®</sup> provides superior design by coupling a double key locking system along with a handle that is fluid in operation.

- **The Tasman<sup>®</sup> utilizes a robust hook bolt**
- **Tasman<sup>®</sup> can be locked from both inside and out via key or snib function.** The snib function allows handle to be locked or unlocked quickly without the use of a key. It is important to note that this feature will work only if the door has been initially unlocked with the key. The key operation of the handle overrides the snib function.
- **Double Keyed Cylinder**

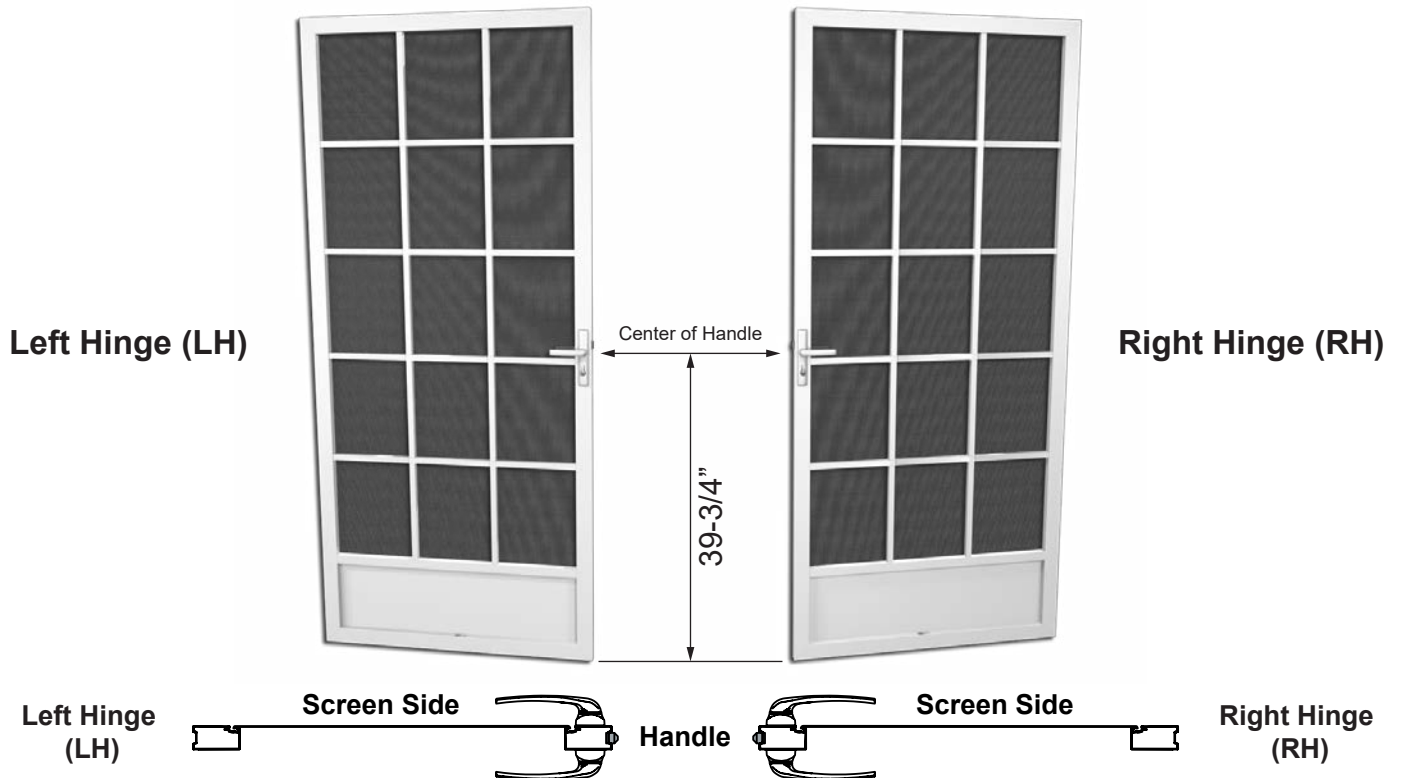

## ORDERING INFORMATION

Upon ordering, it is important to **specify the hinge placement in relation to the screen.** See examples above.  
**Standard placement** of lock on most doors designs is 39-3/4" from the bottom of the door to the center of the handle.

**Exception:** Certain door designs dictate the position of the lock placement.  
 Tasman<sup>®</sup> lock can be placed at a special height on door as per your request.